



# FAÇADE CREATIONS

## Roof Lantern Surveying Guide

# aluminium roof lantern surveying guide

## Upstand position cross section

- When specifying the dimensions of your lantern, you should provide the external dimensions of your upstand and the fitted water proof membrane
- We also recommend that you increase the size of the Lantern by 12mm in both length and width which will give you 6mm overhang all round

### Example


**Upstand (inc Membrane):**  
1840 x 1220mm

**Overhang:**  
12mm x 12mm

**Roof Size:**  
1852 x 1232

- Upstand must be a minimum of 69mm wide (width of lantern eaves beam) level and square.

It is the responsibility of the installer to determine the finishing detail of the inside.

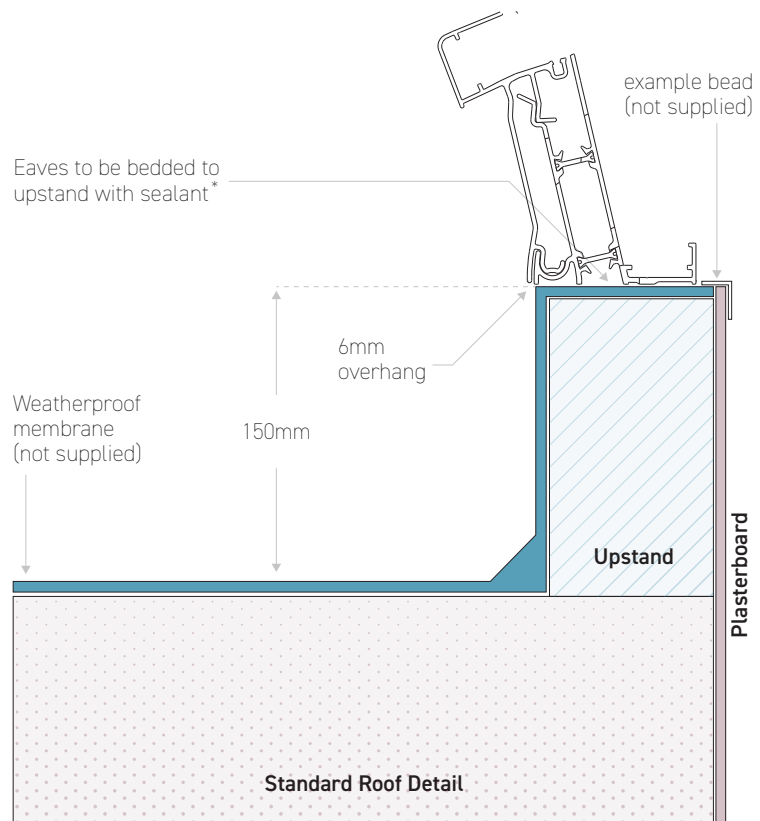

\* Sealant to be applied to the underside of the eaves as per installation guide instructions only



24mm glazing



25 degree fixed pitch



T: +44 (0) 116 2289 3343 E: [info@facadecreations.co.uk](mailto:info@facadecreations.co.uk) W: [www.facadecreations.co.uk](http://www.facadecreations.co.uk)  
Registered in England, Company Number: 16267073