



FAÇADE CREATIONS

Modus

Trade Brochure



modus[®]
+you



modus® flush sash windows in Anteak with Georgian bars offer a quality, traditional timber appearance



A revolution

in design, engineering
and performance

Introducing **modus**[®] – the UK's first fully integrated window and door system from Eurocell

It's a game changer

Welcome to **modus** – a brand new system from Eurocell that leads the market in terms of looks, performance and value for money. Now you can create a whole range of different fenestration types and aesthetic styles from a single system.

modus features the clean and contemporary looks that today's customers demand, together with slimmer sight lines and leading thermal performance. Now, for the first time, there's a genuine alternative to aluminium and timber products, and one offering considerably better value.

Unrivalled aesthetics

Whether it's a sleek ultra contemporary look or elegant traditional architectural styling, **modus** delivers. What's more, you can create standard, slim rebate and flush sash casement windows, reversible windows, tilt and turn windows, entrance doors and French doors – all from this single system. **modus** is also easier and faster to fabricate than other leading systems on the market.

8 systems in 1

for ultimate flexibility

modus® has been designed to help you win new customers, save time and reduce costs

Standard sash casement windows

Featuring slimmer sight lines than other systems, modus standard sash casement windows have 28mm (double) and 44mm (triple) glazing options available. A wide range of styles are possible from this sash type, including wide-opening French windows.

Slim rebate sash casement windows

Offering clean sight lines with an internally flush sash and external slim rebate, this window style allows a variety of window configurations to be created, including French windows. It also brings better thermal performance than equivalent price aluminium systems.

Flush sash casement windows

An internally and externally flush sash offers enhanced aesthetics to rival that of timber windows. Plus, you can even make French windows for uninterrupted, wide openings. This is the first dual material extrusion technology (DMET) flush sash and delivers better thermal performance than equivalent price timber windows.

Reversible windows

modus reversible windows feature a completely flush sash, delivering enhanced aesthetics. As the first DMET reversible system in the UK, this innovative product is also the most thermally efficient in the UK.

Tilt & turn windows

A stepped sash design provides improved weather and thermal performance, as well as enhanced aesthetics. There's a dummy mullion / transom plant-on, and no need for steel reinforcement*.

Entrance doors

Entrance doors boast slimmer sight lines and equal 8mm of cover inside and out.

French doors

A dedicated French door mullion improves aesthetics and thermal performance.

Composite door frame

modus outer frame, transom and mullion is compatible with 56mm or rebated 70mm panels for improved thermal performance over existing 44mm doorsets. For more information, please contact Eurocell Technical Department.

*Dependant on size and location



Maximum performance delivered cost-effectively

Outstanding energy efficiency

Following a £3million investment in research and development, Eurocell created **modus** to deliver industry-leading energy efficiency. With a triple-seal option providing superb thermal performance and air tightness, U-values as low as 0.7 can be achieved – exceeding Passivhaus standards.

By specifying **modus**, double-glazing costs can be reduced by up to 27%*. This unique system delivers more cost-effective triple-glazed specifications too. **modus** – supporting the drive for an affordable zero-carbon future.

Sustainability built-in

When we designed **modus**, sustainability was at the forefront of our thinking. So we made sure that the system utilises 50% post-consumer recycled PVC-U** as standard. Innovative dual material extrusion technology (DMET) ensures fast, efficient use of post-consumer PVC-U in the production process.

Manufactured and recycled at our state-of-the-art plants in Derbyshire, **modus** creates a lower carbon footprint than many profiles made or recycled outside of the UK.

u-values as low as

0.7

* Based on average cost/m² between three leading glazing unit suppliers against a double-glazed specification achieving a 1.2 U-value

** Average. Post-consumer and virgin PVC-U % content varies between profiles



modus® flush sash windows in Anteak offer a quality, traditional timber appearance

A revelation

In quality, choice and value



**Standard
sash**

AESTHETICS TO RIVAL
ANY PVC-U SYSTEM



**Slim rebate
sash**

AESTHETICS TO RIVAL
ALUMINIUM SYSTEMS

One system.
Four design aesthetics.
Thousands of configuration options.



**Flush
sash**

AESTHETICS TO RIVAL
TIMBER SYSTEMS



**Mechanical
joint flush
sash**

AESTHETICS TO RIVAL
ANY TRADITIONAL WINDOW



modus® French doors (shown in Anteak) feature a dedicated mullion for improved aesthetics and thermal performance

More colours More choices

Tastes evolve, which is why we've extended the **modus** standard colour range to meet the changing needs of discerning customers. By standard, we mean in stock, ready to go. A further range of 30+ other colour options is available for delivery in just three weeks (in addition to the Architectural Range).



**BLACK
ASH**
WHITE INTERIOR



**ANTHRACITE
GREY**
WHITE INTERIOR



**SLATE
GREY**
WHITE INTERIOR



**MOONDUST
GREY**
WHITE INTERIOR



ANTEAK
WHITE INTERIOR



ROSEWOOD
WHITE INTERIOR



IRISH OAK
WHITE INTERIOR



CREAM WHITE
WHITE INTERIOR



WHITE ASH
WHITE ASH INTERIOR



WHITE
THROUGH COLOUR

+ ARCHITECTURAL RANGE (SPECIAL ORDER)



**QUARTZ
PLATINUM**
(METALLIC)



ASPHALT
(METALLIC)



**CROWN
PLATIN**
(METALLIC)



**AGATE
GREY**

Improving efficiency, cutting costs

The innovative design of **modus** means lower glass specifications can be used, reducing glazing costs – the most costly element of a window. 90% of **modus** windows need no reinforcements, saving on fabrication labour time. And stockholding will be cut too, as multiple systems are no longer required to offer an equivalent range of products.

up to **27%**
saving on glazing costs*

up to **8%**
saving on labour costs**

up to **42%**
reduction on stockholding***

* Based on average cost/m² between three leading glazing unit suppliers against a double-glazed specification achieving a 1,2 U-value

** Based on a 1200mm x 1200mm side hung next to fixed window compared to fabricating a Eurocell Eurologik equivalent window

*** Fabricators only require 27 stillages instead of 43, based on comparisons against existing Eurocell systems for white profile only



modus® flush sash casement windows in White Ash complements traditional-style properties



Introducing

modus[®] 



Mechanically jointed flush sash window

Advanced technology in a traditional casement window

Modus S, the mechanically jointed flush sash window. Specifically engineered to eliminate the tell-tale diagonal weld of standard PVC-U windows. Choose Modus S to create the look of traditional windows whilst delivering a virtually maintenance-free and highly energy efficient system to your customers.

At a glance:

- + Costs up to 25% less than the nearest equivalent products
- + Precision engineered internal mouldings for the mechanical joint
- + Unique 75mm six-chamber profile system
- + Achieves the new A++ Window Energy Rating and a 0.7 U-value, surpassing passivhaus standards
- + 12 year profiles guarantee*
- + Perfect for premium properties, conservation areas and self-build projects
- + Virtually maintenance-free

*White profiles only



**Modern innovation
creating traditional
aesthetics**

Take a closer look

Through product innovation Modus S offers an additional route for PVC-U windows that would normally not be considered due to restrictions of aesthetics or planning. The precision-engineered internal mouldings that create the mechanical joint gives the look and feel of wood and aluminium by creating a flush sash with perfect square joints, without the need for welding.

- + Realistic woodgrain finish
- + Full range of Modus colours available
- + Smooth, flush fitting profile
- + Flush frame design inside and out
- + Advanced profile design and fabrication
- + Leading energy efficiency



Technical information

Slim rebate sash casement



≡ modus slim rebate sash casement windows offer flush internal aesthetics for ultimate sleek looks


modus slim rebate sash windows offer internally flush and externally slim rebated sashes for a sleek look to rival aluminium systems. A range of Grey and metallic finishes add to the aesthetic, and you can even experiment with differing internal finishes. This delivers significant cost savings over aluminium, as well enhanced thermal performance.

Min / max sizes	Width (mm)	Height (mm)
Top hung (espag)	Min: 320 Max: 1200	Min: 375 Max: 1350
Side hung	Min: 400 Max: 750	Min: 320 Max: 1500
Fixed	Max: 3000	Max: 2400 Combined width and height 5400


Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Krypton	SuperSpacer Premium	Full Thermal	A	9	0.7
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A+	31	0.8
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SwisSpacer Ultimate	None	A	9	1.3
4/20/4	Diamant	N/A	Planitherm Total+	Argon	SuperSpacer Premium	None	A+	12	1.3
4/20/4	Float	N/A	Planibel A	Argon	SuperSpacer Premium	None	A	0	1.4

Contact our Technical department for additional performance specifications

≪ Slim rebate sash window
Triple-glazed

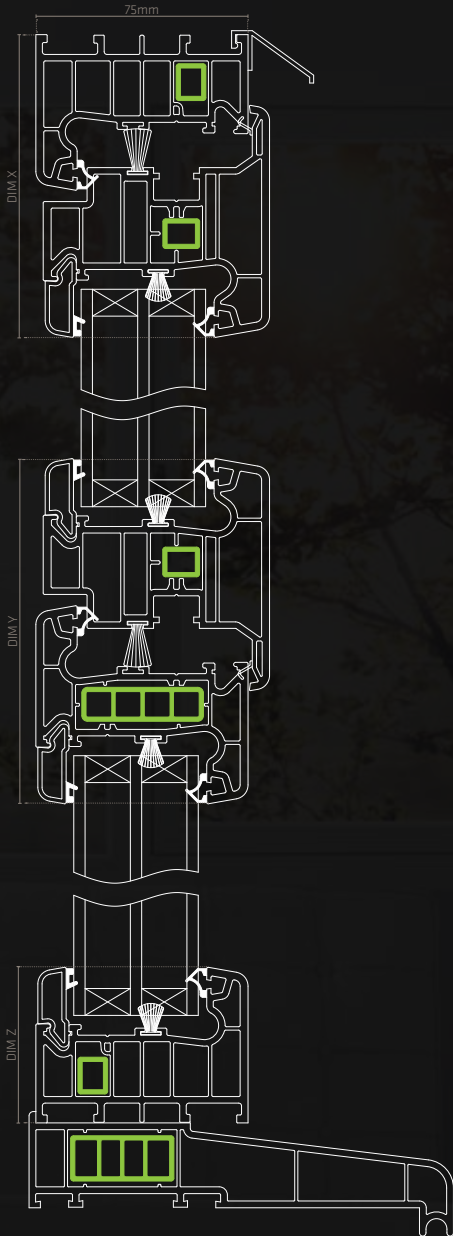

≪ Slim rebate sash window
Double-glazed

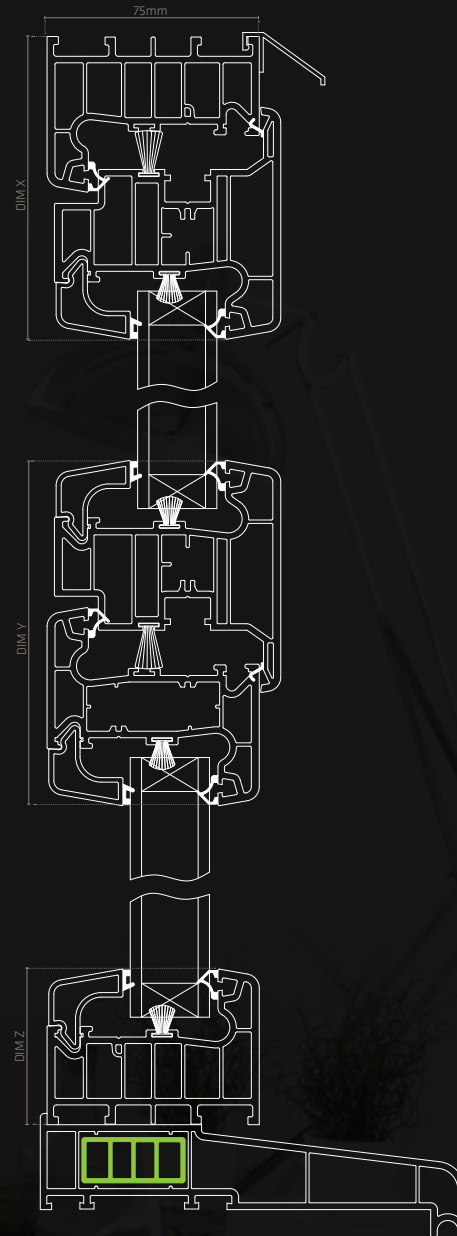

Frame dimension	Dim X
Main Frame (LSF 1021) with Slim Rebate Sash (LSF 1004)	107mm
Large Main Frame (LSF 1006) with Slim Rebate Sash (LSF 1004)	122mm

Frame dimension	Dim Y
Slim Rebate Sash (LSF 1004) with Transom Z (LSF 1003)	122mm
Slim Rebate Sash (LSF 1004) with Intermediate Transom Z (LSF 1023)	137mm

Frame dimension	Dim Z
Main Frame (LSF 1021)	55mm
Large Main Frame (LSF 1006)	70mm

Technical information

Flush sash casement



modus flush sash windows in Anteak offer a quality, natural woodgrain appearance to rival timber


modus flush sash casement windows offer internally and externally flush sashes for an aesthetic to rival timber systems. A range of woodgrain foils means you can achieve a truly natural woodgrain appearance, without the associated costs. It is the first co-extruded flush sash on the UK market, and offers better thermal performance than traditional timber windows.

Min / max sizes	Width (mm)	Height (mm)
Top hung (espag)	Min: 320 Max: 1200	Min: 375 Max: 1350
Side hung	Min: 400 Max: 750	Min: 320 Max: 1500
Fixed	Max: 3000	Max: 2400 Combined width and height 5400


Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Krypton	SuperSpacer Premium	Full Thermal	A	9	0.7
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A+	31	0.8
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SwisSpacer Ultimate	None	A	12	1.3
4/20/4	Diamant	N/A	Planitherm Total+	Argon	SuperSpacer Premium	None	A+	13	1.3

Contact our Technical department for additional performance specifications

≡ **Flush sash window**
Triple-glazed

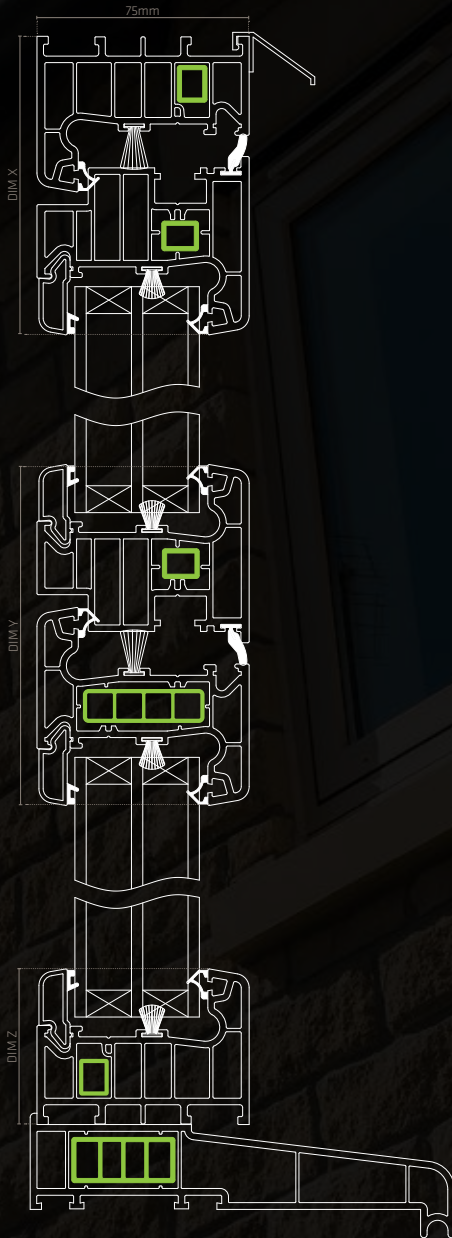

≡ **Flush sash window**
Double-glazed

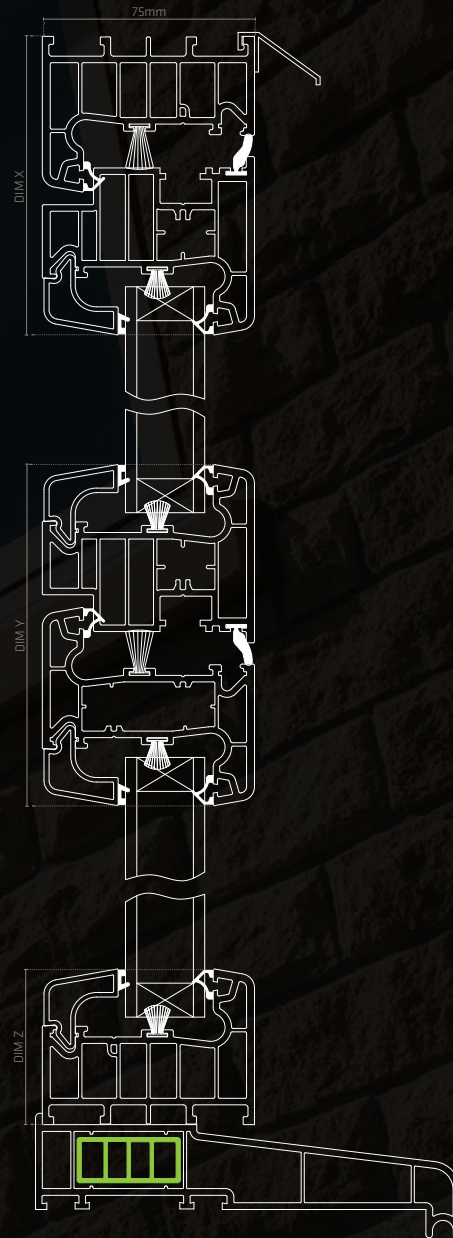

Frame dimension	Dim X
-----------------	-------

Main Frame (LSF 1021) with Reversible Sash (LSF 1008) 105mm

Large Main Frame (LSF 1006) with Reversible Sash (LSF 1008) 120mm

Frame dimension	Dim Y
-----------------	-------

Reversible Sash (LSF 1008) with Transom Z (LSF 1003) 120mm

Reversible Sash (LSF 1008) with Intermediate Transom Z (LSF 1023) 135mm

Frame dimension	Dim Z
-----------------	-------

Main Frame (LSF 1021) 55mm

Large Main Frame (LSF 1006) 70mm

Technical information

Reversible windows



≡ modus reversible windows are the most thermally efficient in the UK


modus reversible windows have a completely flush sash internally and externally. As the first co-extruded reversible system in the UK, this innovative product delivers enhanced aesthetics as well as being the most thermally efficient in the UK. With a U-value as low as 0.7 achievable with a triple-glazed unit, it is the clear choice for new build and commercial projects.

Min / max sizes	Width (mm)	Height (mm)
Reversible windows	Min: 400 Max: 1250	Min: 563 Max: 1500


Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Argon	SuperSpacer Premium	Full Thermal	A	3	0.8
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A+	30	0.8
4/20/4	Diamant	N/A	Planitherm Total+	Argon	SuperSpacer Premium	None	A	11	1.3
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SwisSpacer Ultimate	None	A	9	1.4

Contact our Technical department for additional performance specifications

≡ Reversible window
Triple-glazed

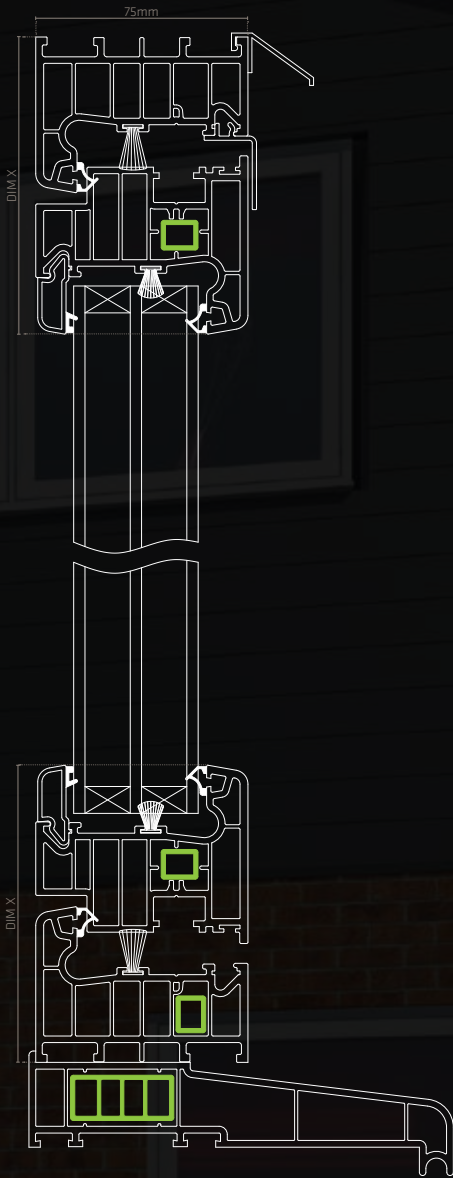

≡ Reversible window
Double-glazed

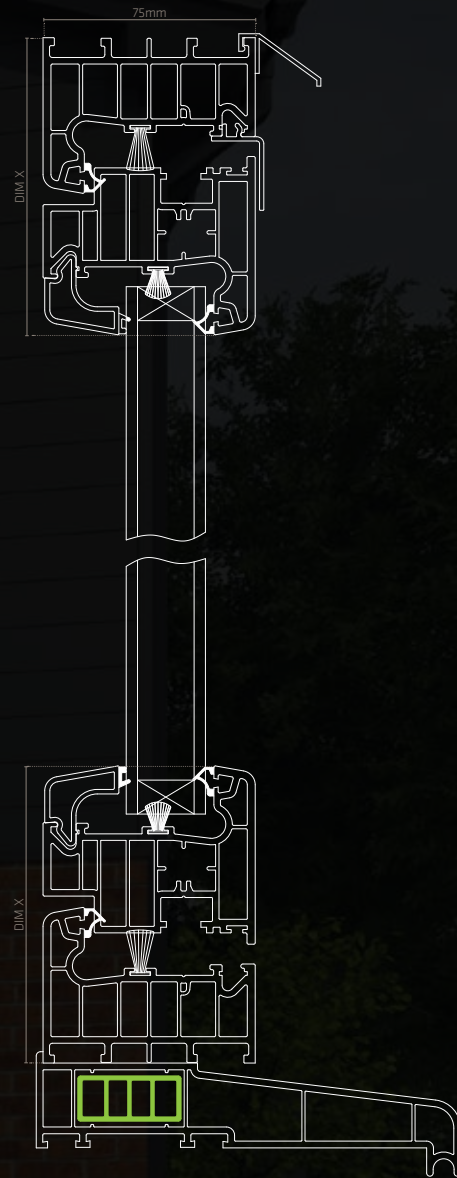

Frame dimension	Dim X
-----------------	-------

Main Frame (LSF 1021) with Reversible Sash (LSF 1008)	105mm
---	-------

Large Main Frame (LSF 1006) with Reversible Sash (LSF 1008)	120mm
---	-------

Technical information

Tilt and turn windows



➤ Dual opening **modus** tilt and turn windows are ideal for high-rise buildings where cleaning access is restricted

modus tilt and turn windows feature a stepped sash design that is complemented by a variety of foil options, including stunning new metallic foils in the Architectural Range. With no need for steel reinforcements and U-values as low as 0.7 achievable with a triple-glazed unit, it's the clear choice for commercial works.


Min / max sizes	Width (mm)	Height (mm)
Tilt and turn windows	Min: 550 Max: 1500	Min: 550 Max: 1500

* Dependant on size and location


Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Krypton	SuperSpacer Premium	Full Thermal	A	9	0.7
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Argon	SuperSpacer Premium	Full Thermal	A	5	0.8
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A+	31	0.8
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SwisSpacer Ultimate	Full Thermal	A	11	1.3
4/20/4	Diamant	N/A	Planitherm Total+	Argon	SuperSpacer Premium	Full Thermal	A+	16	1.3

Contact our Technical department for additional performance specifications

≪ Tilt and Turn window
 Triple-glazed

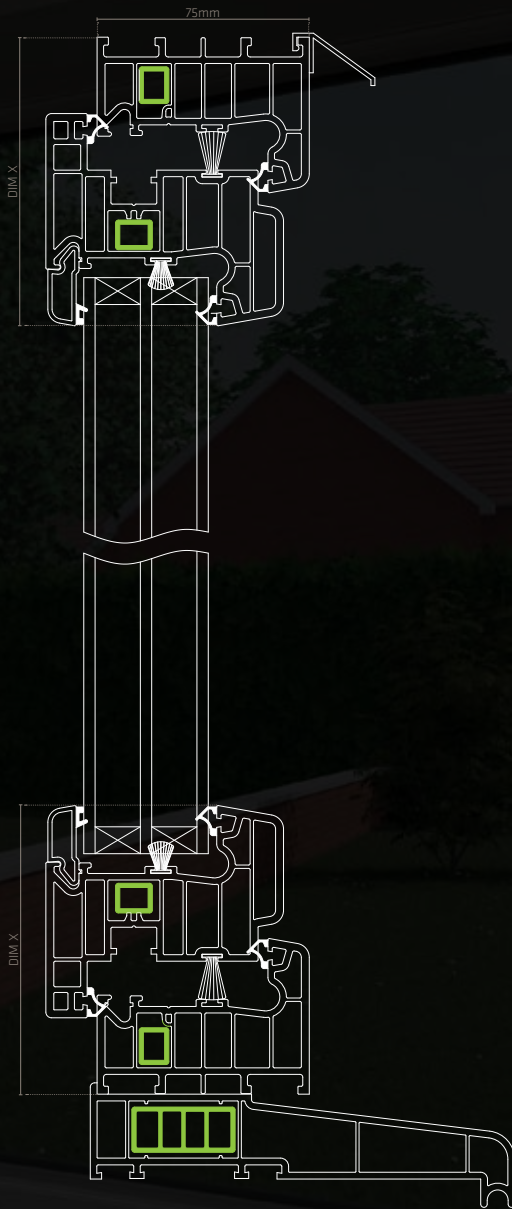

≪ Tilt and Turn window
 Double-glazed

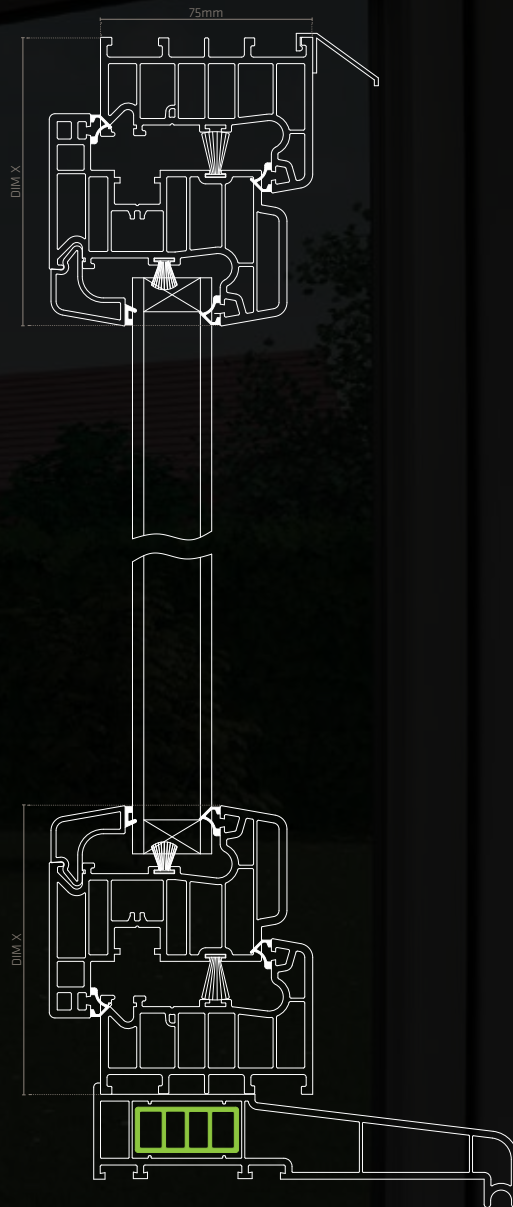

Frame dimension	Dim X
-----------------	-------

Main Frame (LSF 1021) with Tilt & Turn Sash (LSF 1007)	102mm
---	-------

Large Main Frame (LSF 1006) with Tilt & Turn Sash (LSF 1007)	117mm
--	-------

Technical information

French doors



These stunning **modus** French doors feature sleek, flat faces and authentic timber aesthetics

modus French doors feature sleek, flat faces for sophisticated looks. A dedicated mullion with a slim rebate improves sightlines, whilst an option of an additional third seal to improve weather performance is also available. Maximum thermal performance can be achieved with a triple-glazed specification, offering U-values as low as 0.8.

Min / max sizes

French doors

Width (mm)

Min: 1200
Max: 2000


Height (mm)

Min: 1800
Max: 2300


Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Argon	SuperSpacer Premium	Full Thermal	B	-2	0.8
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A+	22	0.9
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SwisSpacer Ultimate	Full	A	8	1.3
4/20/4	Diamant	N/A	Planitherm One	Argon	SuperSpacer Premium	Full	C	-13	1.2

Contact our Technical department for additional performance specifications

≡ **French doors**
Triple-glazed

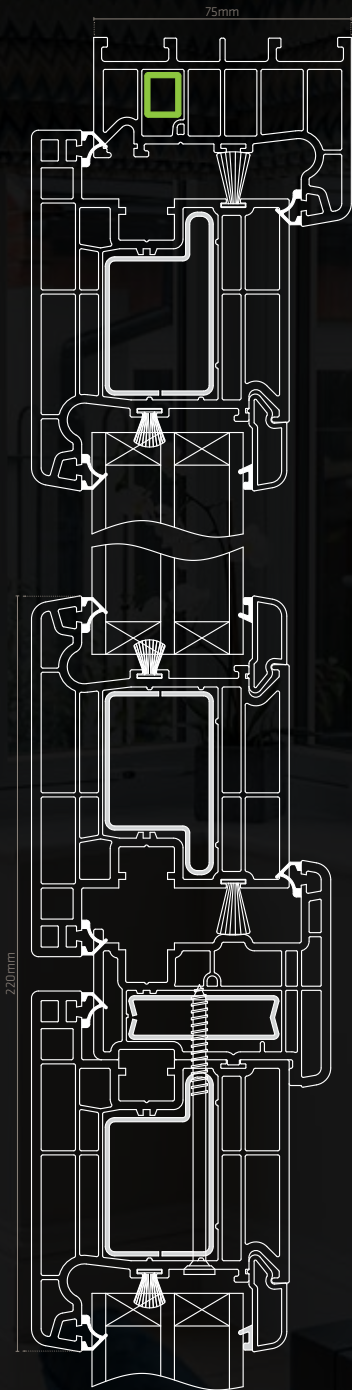

≡ **French doors**
Double-glazed

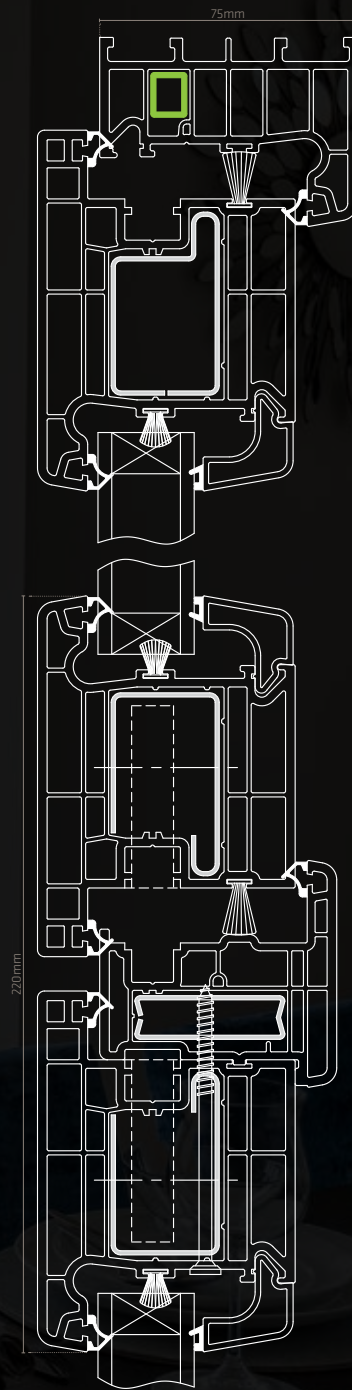

Technical information

Entrance doors



≡ The possibilities are endless with **modus** entrance doors


modus entrance doors offer ultimate flexibility. Whether you choose panels or glazing, the design options are plentiful, and even include the ability to mechanically join the transom or mid-rail. As with the French door, an optional third seal can be utilised to improve weather performance and U-values as low as 0.8 can be achieved with a triple glazed unit.

Min / max sizes	Width (mm)	Height (mm)
Entrance doors	Min: 800 Max: 1000	Min: 1800 Max: 2300


Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Float	Planitherm One	Planitherm One	Argon	SuperSpacer Premium	Full Thermal	A	-56	0.8
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A	-60	0.9
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SuperSpacer Premium	Full	C	-87	1.3
4/20/4	Float	N/A	Planitherm One	Argon	SuperSpacer Premium	Full	B	-81	1.2

Contact our Technical department for additional performance specifications

≪ **Entrance door (with mid-rail)**
 Double-glazed

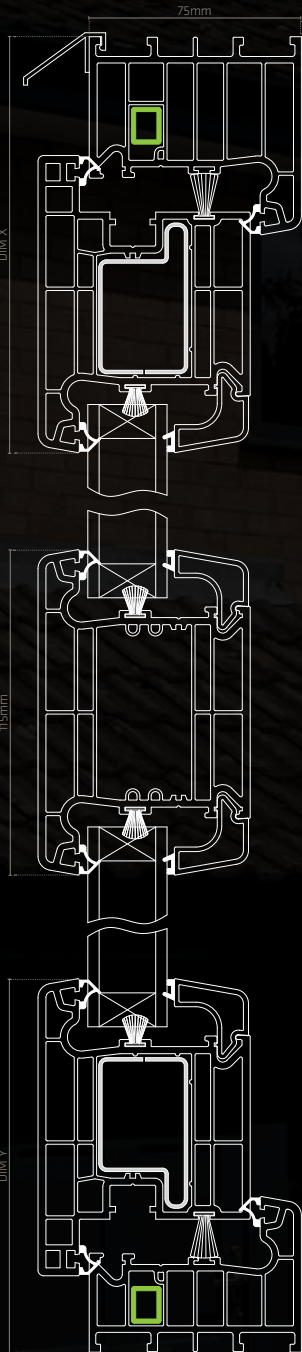

≪ **Entrance door**
 Part M threshold

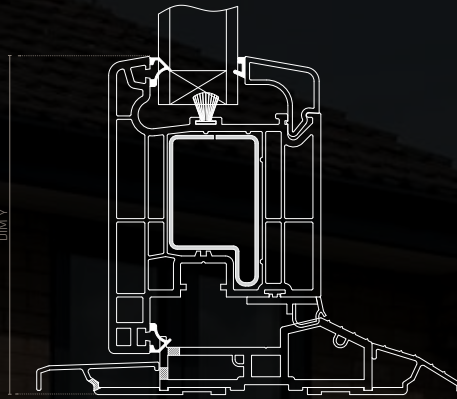

Frame dimension **Dim X**

Main Frame (LSF 1021) with Door Sash T (LSF 1019) 132mm

Large Main Frame (LSF 1006) with Door Sash T (LSF 1019) 147mm

Frame dimension **Dim Y**

Low threshold (LSF 1458) with Door Sash T (LSF 1019) 118mm

Main Frame (LSF 1021) with Door Sash T (LSF 1019) 132mm

Large main frame (LSF 1006) with Door Sash T (LSF 1019) 147mm

Part M low threshold with Door Sash T (LSF 1019) 120mm



Bellway
Plot 73
SOLD
bellway.co.uk



modus® flush sash window with dummy sash allows you to create equal sightlines





modus® standard sash casement window shown in Moondust Grey

1st

First across the board

With its stunning contemporary design, exceptional technical performance, leading energy efficiency and unique multi-functional design, **modus** has taken first place in the UK window and door industry. But the firsts don't stop there...

- **First fully integrated PVC-U system in the UK**
- **First 75mm DMET window system in the UK**
- **First DMET PVC-U reversible system in the UK**
- **First DMET bead in the UK**
- **First leading system to offer a 12-year guarantee in the UK**



T: +44 (0) 116 2289 3343 E: info@facadecreations.co.uk W: www.facadecreations.co.uk
Registered in England, Company Number: 16267073