


FAÇADE
CREATIONS

Roofinox Tin Matte
Technical Datasheet

Roofinox tin-plated ^{316L}

The tin-plated stainless steel

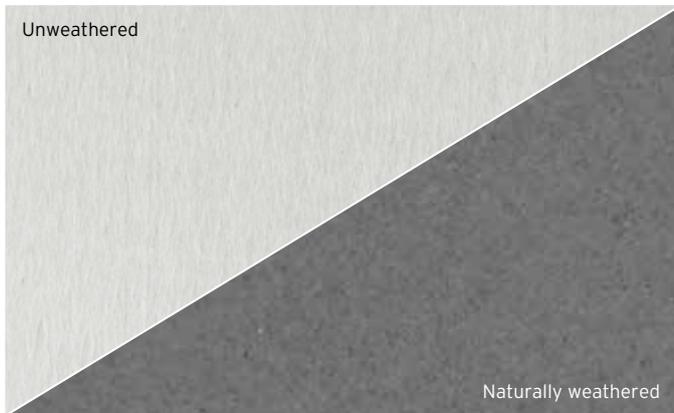

Product description

Roofinox tin-plated is an austenitic stainless steel containing molybdenum with low carbon (316L) with an electroplated coating of tin on both sides. This tin coating is supplied in an unweathered state. The austenitic stainless steel owes its corrosion properties to the alloying elements chrome and molybdenum. The tin coating is in no way connected to the corrosion properties of the stainless steel.

Benefits

- When exposed to the weather, the tin coating develops its typical matt grey patina
- Stainless austenitic steel, used for the substrate, is the ideal (long-lasting) roofing material due to its corrosion properties
- The higher alloy makes it more corrosion resistant
- The tin coating makes Roofinox tin-plated easy to solder
- 100 % natural and 100 % recyclable
- Easy to work with, even at sub-zero temperatures

Instructions for use / recommendations

General Information:

- Roofinox tin-plated should be used in accordance with the latest technical standards, professional regulations and norms.
- No matter whether it is used for cold or warm roofs, Roofinox tin-plated is ideal for the roof itself and all associated flashings on the roof.
- When Roofinox tin-plated is used for standing seam roofs, all seams must be additionally sealed using seam sealant or similar waterproofing methods.
- Roofinox tin-plated is not recommended for vertical surfaces, wall-cladding and soffits because uniform patina and weathering cannot be guaranteed. Direct contact with aggregate concrete slabs, gravel, soil, humus etc. should be avoided. In both cases we recommend using Roofinox Classic or Plus 0.4 mm.
- **Transport and storage:** Roofinox tin-plated must be transported and stored in a dry, ventilated manner, otherwise
- **Soldering:** Make sure that only orthophosphoric acid-based flux is used. It is also important to clean immediately with fresh water (or a cleaning agent recommended by the manufacturer) after soldering. The instructions on our information sheet on soldering should be followed.
- **Patination:** Patination is the process in which the metal reacts with the environmental influences. With Roofinox tin-plated it is the tin coating that reacts. One of the most important factors is the contact with water and moisture. The result is usually a uniform patina, but this cannot be guaranteed because the building specific environmental influences are not known. Roofinox tin-plated can therefore develop light yellow stains on delivery, which, however, will patinate further with regular water contact. The same counts for gray or black spots which are emerging before delivery or with the first patination. This is part of the point-shaped patination process of Roofinox tin-plated.


Specific Data Roofinox tin-plated 316L

| | | | | | | | | | | | |
|--|--|---|-------|-------|---|-------|---|--------------------------|-------|-------|-------|
| Material no. | ASTM TYPE 316L according to ASTM A240M | | | | | | | | | | |
| Code names | D (DIN/EN) | 1.4404 / X 2 CrNiMo 17-12-2 | | | | | | | | | |
| | USA (ASCM) | 316L | | | | | | | | | |
| Chemical compositions (in % by weight) | | C | Cr | Mo | Ni | Mn | | | | | |
| | min. | - | 16.5 | 2.0 | 10.0 | - | | | | | |
| | max. | 0.03 | 18.5 | 2.5 | 13.0 | 2.0 | | | | | |
| Mechanical properties (traverse samples) at room temp. to EN 10 088-2 | Dimensions Range | Rp (0,2 % yield strength) N/mm ² | | | Rm (tensile strength) N/mm ² | | | A80 (elongation) % | | | |
| | Cold-rolled strip s ≤ 6 mm | ≥ 240 | | | 530-680 | | | ≥ 40 | | | |
| Minimum properties at elevated temperatures | Temperature °C | 100 | 150 | 200 | 250 | 300 | 350 | | | | |
| | Rp _{0,2} (0,2 %-yield strength) N/mm ² | 166 | 152 | 137 | 127 | 118 | 113 | | | | |
| Physical properties | Density kg/dm ³ | Modulus of elasticity in kN/mm ² at | | | | | Thermal expansion in 10 ⁻⁶ · K ⁻¹ between 20°C and | | | | |
| | | 20°C | 100°C | 200°C | 300°C | 400°C | 100°C | 200°C | 300°C | 400°C | 500°C |
| | 8.0 | 200 | 194 | 186 | 179 | 172 | 16 | 16,5 | 17 | 17,5 | 18 |
| | Thermal conductivity at 20°C W/m · K | Specific heat at 20°C J/kg · K | | | Electrical Resistivity at 20°C Ω · mm ² /m | | | Magnetisability | | | |
| 15 | 500 | | | 0,75 | | | not present ²⁾ | | | | |
| ²⁾ Roofinox 316L may be slightly magnetic in quenched condition. Magnetisability increases with increasing strain hardening. | | | | | | | | | | | |
| Surface finish | electroplated coating of tin | | | | | | | | | | |
| Product forms | cold-rolled wide strip, slit strip, cut sheets. The marked side ist the A-side of the coil. | | | | | | | | | | |
| Edge finish | cut edges | | | | | | | | | | |
| Tolerances | Tolerances according to EN 10259; without or with lowest necessary edge waving, will not influence bending or profiling; low warping | | | | | | | | | | |

| Delivery options | Dimensions | 0,4 mm | | | 0,5 mm | | | 0,6 mm | | 0,8 mm | |
|------------------|-----------------|--------|-----|------|--------|-----|------|--------|------|--------|------|
| | Substrate alloy | 439 | 304 | 316L | 439 | 304 | 316L | 304 | 316L | 304 | 316L |
| 500 mm | | | • | • | • | • | • | | | | |
| 625 mm | | | | • | • | • | • | | | | |
| 1.000 mm | | • | • | • | • | • | • | | | | |
| 1.250 mm | | | | | | | | | | | |

• available on stock • orderable



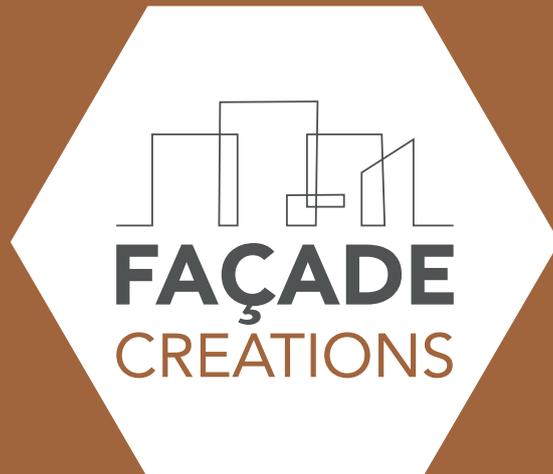

T: +44 (0) 116 2289 3343 E: info@facadecreations.co.uk W: www.facadecreations.co.uk
Registered in England, Company Number: 16267073