

FAÇADE CREATIONS

Shingles
System

Shingles from Metal Solutions


Metal Solutions Shingle cladding is perhaps the most versatile of all the cladding systems available.

Shingle cladding makes an eye catching impression and can be adapted for complex roofing and cladding geometries and virtually all curves.

Shingles can be square, rectangular, triangular, diamond and rhomboid in a range of differing sizes.


The combinations are almost infinite.....

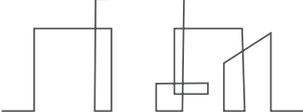


FAÇADE
CREATIONS

Shingle System

1	Metal Shingles
2	Breather Membrane
3	18mm WBP Plywood
4	Timber Batten
5	Breather Membrane
6	Insulation
7	Vapour Control Layer
8	Fixing Clip

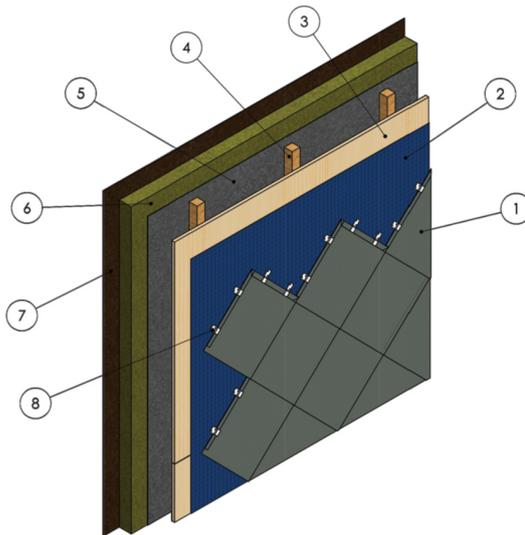

Shingle Cladding on Ventilated Plywood

Shingles


Shingles can be manufactured in zinc, copper, brass, bronze, stainless steel, pre-coated aluminium, GreenCoat steel or anodised aluminium.

The variations in shingle style, size and finish gives an infinite amount of options available to the specifier.


The thickness varies with material but generally ranges from 0.5mm to 1.0mm. Shingles are normally installed to a ventilated plywood substrate, however other substrates can be considered.

A standard range of details are available, along with technical assistance on a project by project basis.

Typical Shingle

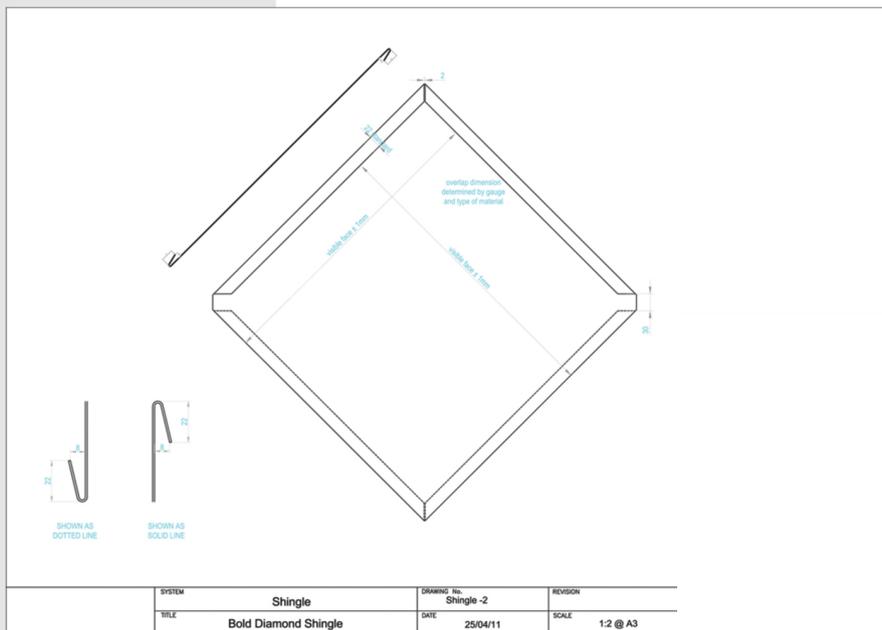


Typical Details

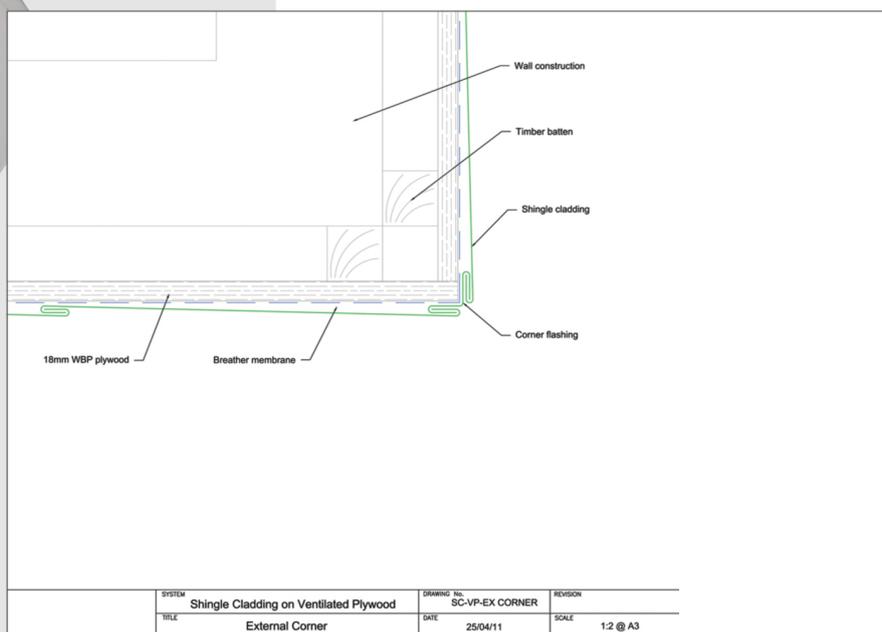



This Shingles leaflet is intended as an aid in understanding the Shingle system and refers to standard situations. The general fully supported metal roofing guidelines must be observed. The data contained in this publication is based on our own practical experience and we accept no liability for the accuracy or completeness. We would always advise that project proposals are checked by an engineer prior to installation.

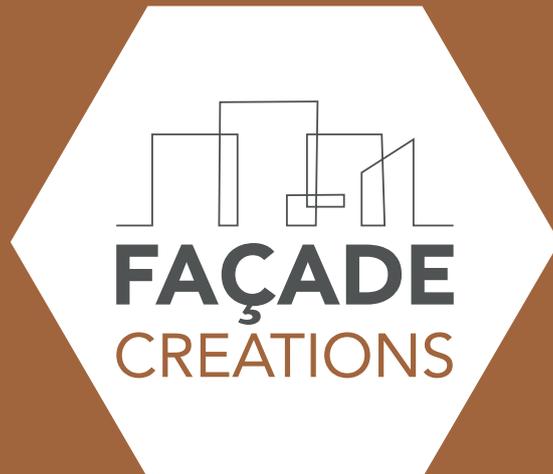

T: +44 (0) 116 2289 3343 E: info@facadecreations.co.uk W: www.facadecreations.co.uk
Registered in England, Company Number: 16267073