

FAÇADE CREATIONS

Thermoseam
Guide

TS-25 Warm Roof Cleat

For the installation of traditional standing seam to a warm roof construction

Must be used in conjunction with an air-tight vapour barrier

Clip

Grade: Stainless steel 1.4301
Base thickness: 0.6mm
Strap thickness: 0.4mm
Slot length: 50mm
Free movement: 40mm

Peg


High density polypropylene
Lengths: 50mm, 90mm, 130mm, 190mm

Pullout

Pullout value: 820N / Clip

Screw Fixing Table:

Peg length mm	Insulation thickness	Head recess 15 mm Plywood 25 mm	Screw length mm
L	T	D	
50	55	40	45
	65	40	55
	75	40	65
	85	40	75
90	95	40	45
	105	40	55
	115	40	65
	125	40	75
130	135	40	45
	145	40	55
	155	40	65
	165	40	75
	175	40	85
	185	40	95
190	195	40	45
	205	40	55
	215	40	65
	225	40	75
	235	40	85
	245	40	95
	255	40	105

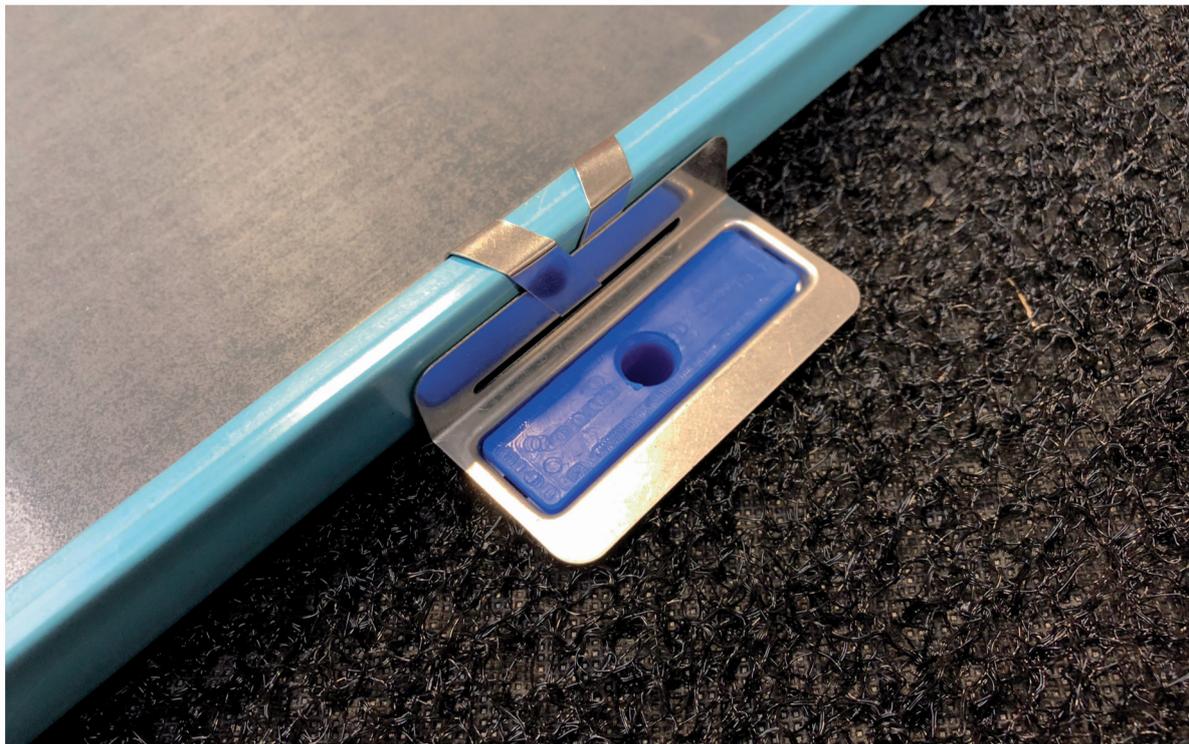



T: +44 (0) 116 2289 3343 E: info@facadecreations.co.uk W: www.facadecreations.co.uk
Registered in England, Company Number: 16267073